


V2-IEX561216AV

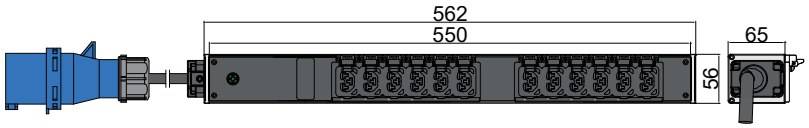

FEATURES	
Technology	Basic
Energy Metering	No
Metering per Input Line	No
Circuit Breaker Monitoring	No
Metering per Output Receptacle	No
Remote Outlet Switching	No
Dual Ethernet	No
Networking Protocols	No
PDU Cascading	No
Power Share	No
Display	No
Residual Current Monitoring	No
Rack Acces Control	No
USB Ports	No
Environmental Sensors	No
INPUT	
Plug	IEC60309 1P+N+E, 16A, Watertight IP44
Cable Length	3 meter
Cable Type	H05VV-F3G1.5mm²
Max. Input Load	16A
Rated Input Voltage	190-250V Single phase
Frequency	50-60Hz
Power Capacity	3680W
OUTPUT	
Rated Output Voltage	190-250V Single phase
Output Types	12 IEX (C13/C15/C19/C21) with IEXV2 LOCK
Overload Protection	No
CHASSIS	
Dimensions (H x W x D)	562 x 56 x 65 mm
Color	RAL 9004 black powder coat
Mounting Options	3 mounting options (see page 2)
Required Torque for Mounting Screws	≥2.54N·m (22.4 in-lbs)
OPERATING ENVIRONMENT	
Temperature Range	0º to 60º C (30º to 140º F)
Humidity	0 - 95 %
Elevation	0 - 4000 Meters
CERTIFICATIONS	
IEC 62368-1 (Third Edition); EN55032: 2015/A1:2020; EN55035: 2017/A11:2020	




More information at: www.powertekpdus.com - ©Powertek Industries Ltd. All Rights Reserved

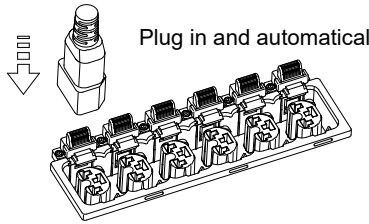


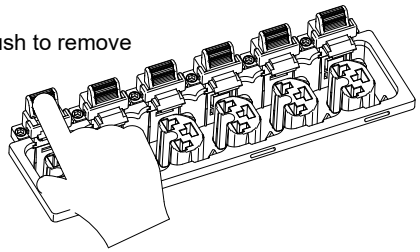


Locking system compatible with standard C14/C16/C20/C22 plug

C13 Lock Part


Toolless Button	MT215	Toolless Mounting Buttons with Removable 90° Rotation Brackets
		

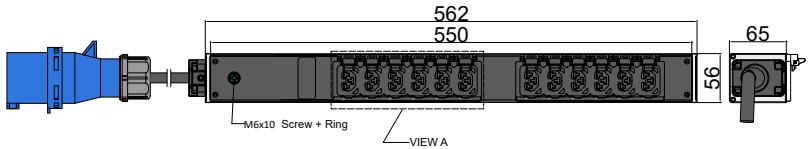





VIEW A:

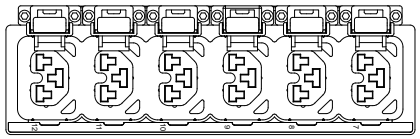

IEX is C13/C15/C19/C21 combination outlet P-LOCK and standard plug compatible

Basic Series	OUTPUT	OPERATING TEMPERATURE
	(12) IEX black (Max rate 16A)	0° to 60°C

INPUT	BRANCH CIRCUITS	MOUNTING ACCESORIES
190-250VAC 16A 50HZ IEC60309 1P+N+E, 16A, Watertight IP44 3m H05VV-F3G1.5mm² Power Lead		(2) Toolless Button (2) MT215 (2) Toolless Mounting Buttons with Removable 90° Rotation Brackets

Revisions		
Rev	Description	Date

DRAWING TYPE
CATIA
(NO PERMISSION.NO CHANGING)

unit=mm

TECHNICAL STANDARD
IT11;
NO RUST
NO FLAW ON THE SURFACE

FILLET	R0.5
ANGLE	±0.5°


FIRST ANGLE

V2-IEX561216AV

Housing	Aluminium
	Black Powder Coating
	RAL9004

Powertek™

DATE 25-04-2026

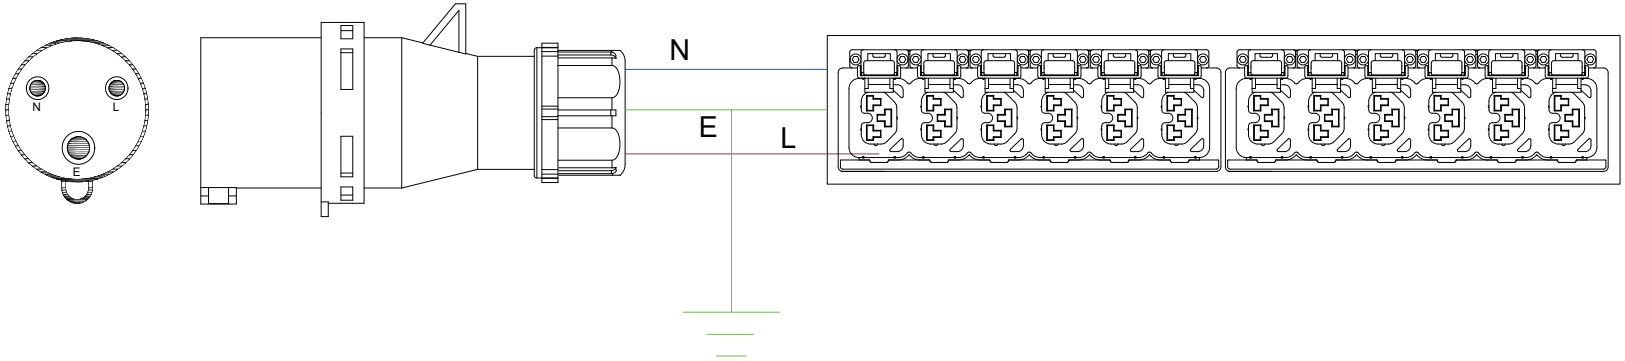

DRAWING TYPE CATIA (NO PERMISSION.NO CHANGING)	V2-IEX561216AV-wiring
unit=mm	Housing
TECHNICAL STANDARD IT11; NO RUST NO FLAW ON THE SURFACE	
FILLET R0.5	
ANGLE ±0.5°	
FIRST ANGLE	
	DATE 25-04-2026